


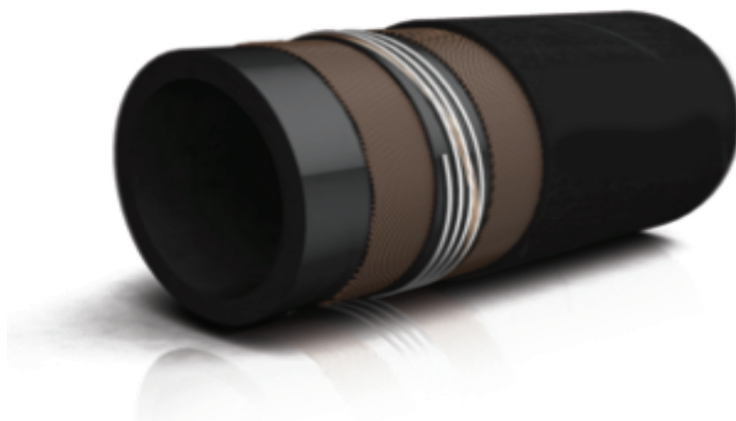

## IRSBCSWL - BULK POWDER CEMENT HOSE 10 Bar 4:1 SF

**TEMPERATURE RANGE** -30°C to 80°C

**CONSTRUCTION**

**TUBE**

NR conductive black, smooth abrasion according to DIN 53516: ~ 50mm<sup>3</sup>

**REINFORCEMENT**

High tensile textile cord, steel helix

**COVER**

SBR/NR black smooth/textile impression conductive, resistant to weather and abrasion

| ID (mm) | OD (mm) | WALL (mm) | BEND RAD. (mm) | WEIGHT (kg/m) | WP (bar) | BP (bar) |
|---------|---------|-----------|----------------|---------------|----------|----------|
| 102.0   | 122.0   | 10.0      | 408            | 5.2           | 10       | 40       |

Batch marked every metre to provide traceability in compliance with EN10204 2 type 2.2