


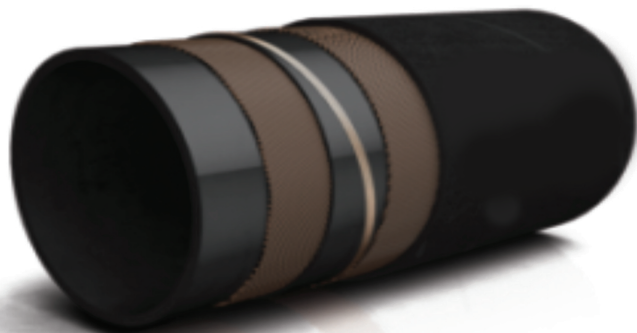

IRSBHW - BULK PRODUCTS HARD WALL HOSE 20 Bar 4:1 SF

TEMPERATURE RANGE -30°C to 80°C

CONSTRUCTION

TUBE

NR conductive black, smooth protects from static electricity
abrasion according to DIN 53516: ~ 50mm³

REINFORCEMENT

High tensile textile cord, steel helix

COVER

SBR/NR black smooth/textile impression conductive, resistant to
weather and abrasion

Special hose for pneumatic or hydraulic transport of abrasive media such as cement, sand, etc
antistatic compound of hose liner protects from static electricity.

ID (mm)	OD (mm)	WALL (mm)	BEND RAD (mm)	WEIGHT (kg/m)	WP (bar)	BP (bar)
102.0	126.0	12.0	408	6.5	20	80
127.0	151.0	12.0	572	8.3	20	80

Batch marked every metre to provide traceability in compliance with EN10204 2 type 2.2