


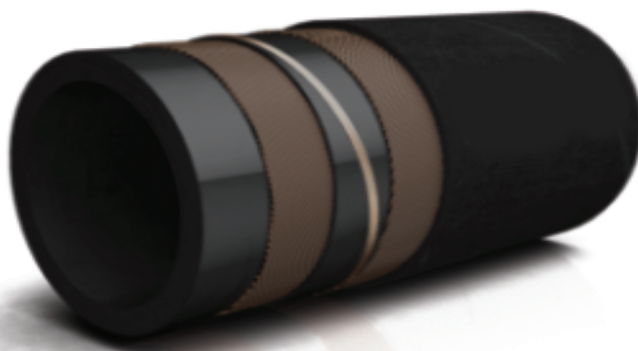

IRSDWSW - DRILL WATER SOFT WALL HOSE 20 Bar 4:1 SF

TEMPERATURE RANGE -30°C to 100°C

CONSTRUCTION

TUBE CR, black, smooth, oil resistant

REINFORCEMENT High tensile textile cord, two crossing antistatic wires

COVER CR, black smooth with cloth impression resistant to weather and abrasion

Drillwater delivery.

ID (mm)	OD (mm)	WALL (mm)	BEND RAD. (mm)	WEIGHT (kg/m)	WP (bar)	BP (bar)
76.0	96.0	10.0	608	3.6	20	80
102.0	122.0	10.0	816	4.7	20	80

Batch marked every metre to provide traceability in compliance with EN10204 2 type 2.2