


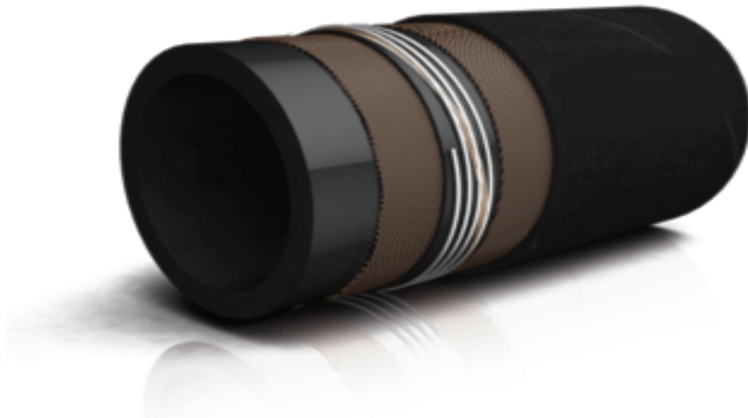

IRSFHW34 - FUEL HARD WALL HOSE

34 Bar 4:1 SF

TEMPERATURE RANGE -40°C to 100°C

CONSTRUCTION

TUBE

Oil resistant elastomer compound black, smooth

REINFORCEMENT

High tensile textile cord, steel helix wires two crossing antistatic wires

COVER

Blend of synthetic elastomer compound, black anti-static smooth with cloth impression, high oil, heat, abrasion, weather and ozone resistant

Suction and discharge hose for transport of mineral oil products and fuel mixtures with aromatic content up to 50%.

ID (mm)	OD (mm)	WALL (mm)	BEND RAD. (mm)	WEIGHT (kg/m)	WP (bar)	BP (bar)
76.0	99.0	11.5	532	4.8	34	136
102.0	126.0	12.0	714	6.6	34	136

Batch marked every metre to provide traceability in compliance with EN10204 2 type 2.2