


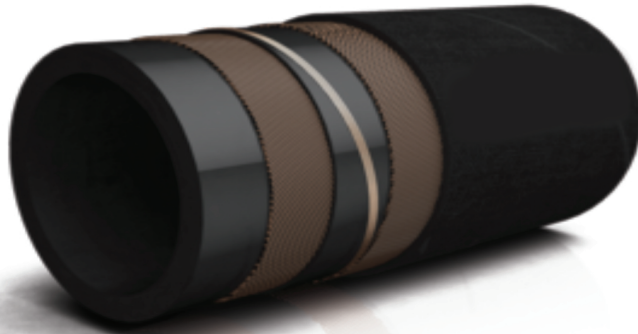

IRSFSW - FUEL HOSE SOFT WALL 20 Bar 4:1 SF

TEMPERATURE RANGE -40°C to 100°C

CONSTRUCTION

TUBE

REINFORCEMENT

COVER

Oil resistant elastomer compound black, smooth,
High tensile textile cord, two crossing antistatic wires

Blend of synthetic elastomer compound, black anti-static smooth
with cloth impression, high oil, heat, abrasion, weather and ozone
resistant

Discharge hose for transport of mineral oil products and fuel mixtures with aromatic content up to 50%.

ID (mm)	OD (mm)	WALL (mm)	BEND RAD. (mm)	WEIGHT (kg/m)	WP (bar)	BP (bar)
51.0	68.0	8.5	408	2.1	20	80
63.0	81.0	9.0	504	2.6	20	80
152.0	174.0	11.0	1216	7.6	20	80

Batch marked every metre to provide traceability in compliance with EN10204 2 type 2.2