


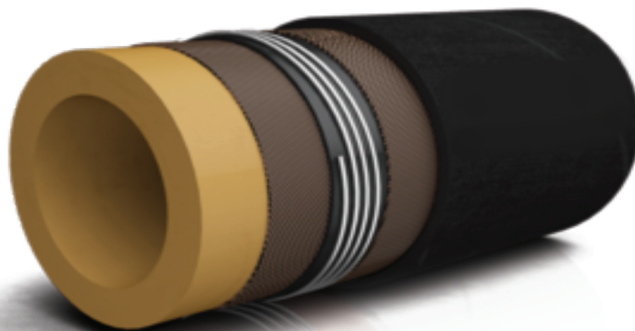

## IRSHA - HOT AIR HARD WALL HOSE

### 10 Bar 4:1 SF 180°C

**TEMPERATURE RANGE** -35°C to 180°C

**CONSTRUCTION**

**TUBE**

High temperature and ozone resistant synthetic elastomer compound, smooth

**REINFORCEMENT:**

High tensile textile cord, steel helix

**COVER:**

High temperature, weather and ozone resistant synthetic elastomer compound, black smooth with cloth impression

High temperature air hose designed to transfer hot, non-oily air up to 180°C from blowers or compressors to storage tanks and silos, used during transfer of dry bulk materials.

| ID (mm) | OD (mm) | WALL (mm) | BEND RAD. (mm) | WEIGHT (kg/m) | WP (bar) | BP (bar) |
|---------|---------|-----------|----------------|---------------|----------|----------|
| 102.0   | 117.0   | 7.5       | 408            | 4.1           | 10       | 40       |

Batch marked every metre to provide traceability in compliance with EN10204 2 type 2.2