


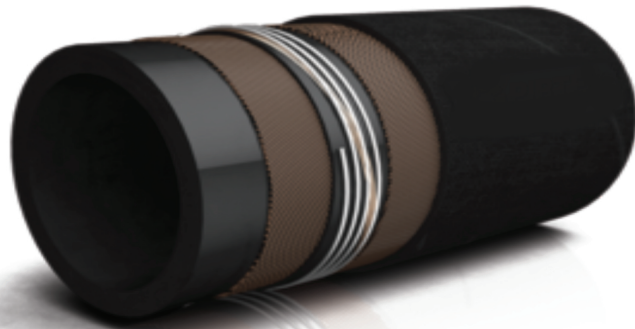

IRSOFSO - OIL FUEL HARD WALL HOSE

10 Bar 4:1 SF

(AS2683 Type 1, Grade 2, Kind 1)

TEMPERATURE RANGE -30°C to 100°C

CONSTRUCTION

TUBE NBR, black, smooth, oil resistant

REINFORCEMENT High tensile textile cord, steel helix wires two crossing antistatic wires

COVER CR/BR, black smooth with cloth impression resistant to weather and abrasion

Fuel oil with up to 50% Aromatic Content

ID (mm)	OD (mm)	WALL (mm)	BEND RAD. (mm)	WEIGHT (kg/m)	WP (bar)	BP (bar)
19.0	29.0	5.0	76	0.53	10	40
25.0	35.0	5.0	100	0.68	10	40
32.0	42.0	5.0	128	0.81	10	40
38.0	49.0	5.0	152	1.20	10	40
51.0	62.0	5.0	204	1.47	10	40
63.0	75.0	6.0	252	2.11	10	40
76.0	89.0	6.5	304	2.40	10	40
102.0	116.0	7.0	408	3.93	10	40
152.0	170.0	9.0	760	8.10	10	40
203.0	225.0	11.0	1015	13.10	10	40

Batch marked every metre to provide traceability in compliance with EN10204 2 type 2.2