


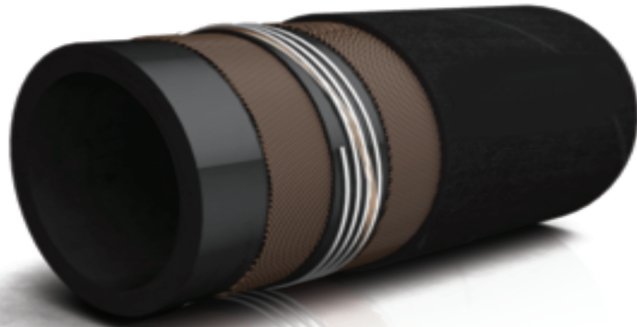

IRSWSD - WATER SUCTION DELIVERY HOSE 15 Bar 3:1 SF

TEMPERATURE RANGE -30°C to 85°C

CONSTRUCTION

LINING

Synthetic elastomer compound, black smooth, resistant to waste water from 5 to 10pH

REINFORCEMENT

High tensile textile cord, steel helix

COVER

Synthetic elastomer compound, Black, smooth with cloth impression resistant to weather and abrasion

Water hose for suction & delivery purposes in tough applications in industry, agriculture and construction works.

ID (mm)	OD (mm)	WALL (mm)	BEND RAD. (mm)	WP (bar)	BP (bar)
254.0	284.0	15.0	1524	15	45
305.0	339.0	17.0	1830	15	45